

ARES

Chromium-plated




Chromium-plated radiator (cod. 50)

Bathroom Radiator **ARES**

Chromium-plated

The **Chromium plated** version of the **ARES** radiator. Thanks to its essential lines and the modernity of the chromium plating, chromium plated ARES is a visually innovative towel warmer.

Particularly suited to installation in small rooms, ARES meets the interior design requirements of today's homes.



Ares is available also in Standard White version.


Detail of the electric heater with electronic control (a wireless version is also available). Both electric heaters can be installed as an optional for mixed radiator function.



ARES chrome plated



In photo: Ares Chrome radiator. Height mm 1720, width mm 600, colour Chrome-plated (cod. 50).

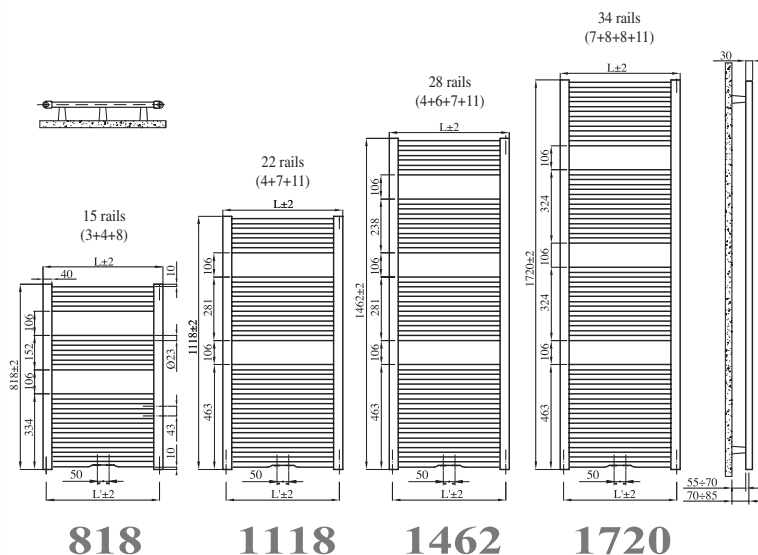

TECHNICAL SPECIFICATIONS: steel towel warmer radiator with horizontal elements featuring round tubes with a 23 mm diameter; side manifolds with a 40x30 mm semioval section; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

| MODEL | Code | Depth P mm | Height H mm | Length L mm | Conn. centre L' mm | Weight Kg | Capacity lit | Thermal power | | | | | Expon. n. | Dual power Watt |
|--|--------------------|---------------|----------------|----------------|-----------------------|--------------|-----------------|------------------|-----------------|-----------------|-----------------|-----------------|--------------|--------------------|
| | | | | | | | | Δt 50°C Btu/h | Δt 50°C Watt | Δt 40°C Watt | Δt 30°C Watt | Δt 20°C Watt | | |
| 818 H mm 818 15 RAILS 2 SPACES | O X P043 01 | 42 | 764 | 436 | 406 | 7,0 | 3,7 | 293 | 340 | 260 | 184 | 113 | 1,199 | 300 |
| | O X P058 01 | 58 | 764 | 586 | 556 | 8,9 | 4,7 | 399 | 464 | 355 | 251 | 155 | 1,199 | 400 |
| | O X P074 01 | 79 | 764 | 736 | 706 | 10,8 | 5,6 | 503 | 585 | 448 | 317 | 195 | 1,199 | 700 |
| | O X P089 01 | 80 | 764 | 890 | 860 | 12,7 | 6,5 | 607 | 706 | 540 | 383 | 235 | 1,199 | 700 |
| 1118 H mm 1118 22 RAILS 2 SPACES | O X M043 01 | 42 | 1196 | 436 | 406 | 10,7 | 5,7 | 447 | 520 | 397 | 281 | 173 | 1,201 | 400 |
| | O X M058 01 | 58 | 1196 | 586 | 556 | 13,6 | 7,2 | 609 | 708 | 542 | 384 | 236 | 1,201 | 700 |
| | O X M074 01 | 79 | 1196 | 736 | 706 | 16,5 | 8,6 | 769 | 894 | 684 | 484 | 297 | 1,201 | 700 |
| | O X M089 01 | 80 | 1196 | 890 | 860 | 19,5 | 10,1 | 927 | 1078 | 824 | 584 | 359 | 1,201 | 1000 |
| 1462 H mm 1462 28 RAILS 3 SPACES | O X L043 01 | 42 | 1520 | 436 | 406 | 13,1 | 7,1 | 556 | 646 | 494 | 350 | 215 | 1,202 | 700 |
| | O X L058 01 | 58 | 1520 | 586 | 556 | 16,8 | 8,9 | 757 | 880 | 673 | 476 | 293 | 1,202 | 700 |
| | O X L074 01 | 79 | 1520 | 736 | 706 | 20,5 | 10,7 | 955 | 1111 | 850 | 601 | 369 | 1,202 | 1000 |
| | O X L089 01 | 80 | 1520 | 890 | 860 | 24,2 | 12,5 | 1152 | 1339 | 1024 | 725 | 445 | 1,202 | 1000 |
| 1720 H mm 1720 34 RAILS 3 SPACES | O X G043 01 | 42 | 1808 | 436 | 406 | 16,2 | 8,7 | 680 | 791 | 605 | 428 | 263 | 1,203 | 700 |
| | O X G058 01 | 58 | 1808 | 586 | 556 | 20,6 | 10,9 | 928 | 1079 | 825 | 584 | 358 | 1,203 | 1000 |
| | O X G074 01 | 79 | 1808 | 736 | 706 | 25,0 | 13,1 | 1170 | 1361 | 1041 | 736 | 452 | 1,203 | 1000 |
| | O X G089 01 | 80 | 1808 | 890 | 860 | 29,4 | 15,2 | 1411 | 1641 | 1255 | 888 | 545 | 1,203 | 1000 |

01 = Standard White colour code - for different colour codes see the colour code.

X = I for connections at either end of the radiator; B for 50 mm connections

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Packaging include: 1 1/2" adjustable chrome plated air vent; 3 chrome wall brackets.

CE⁰⁵
EN442-1

EN⁴⁴²
EURO NORM

IRSAP
i termoarredatori