


# ARES

Radiator painted in Standard White (cod. 01)

## Bathroom radiator ARES

**ARES** is the answer to any functional and heating requirement. Thanks to the spaces between rails, it can be used to dry items of linen or as a towel warmer. Its subtle and elegant appearance makes **ARES** particularly suitable for bathrooms and kitchens where it blends easily with any interior.

The **ARES** "termoarredatore®" also comes in the 50 mm connection version.



Ares is available also in Chromium-plated finish.


Detail of the electric heater with electronic control (a wireless version is also available). Both electric heaters can be installed as an optional for mixed radiator function.



# ARES



In photo: Ares radiator. Height mm 1720, width 600 mm, colour Standard White (cod. 01).

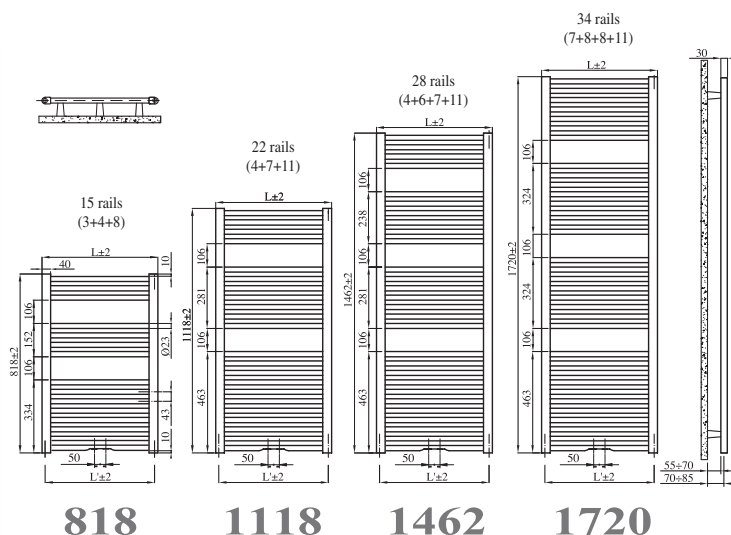

**TECHNICAL SPECIFICATIONS:** steel towel warmer radiator with horizontal elements featuring round tubes with a 23 mm diameter; side manifolds with a 40x30 mm semioval section; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

MODEL	Code	Depth P mm	Height H mm	Length L mm	Conn. centre L' mm	Weight Kg	Capacity lt	Thermal power					Expon. n.	Dual power Watt
								Δt 50°C Btu/h	Δt 50°C Watt	Δt 40°C Watt	Δt 30°C Watt	Δt 20°C Watt		
<b>818</b> H mm 818 15 RAILS 2 SPACES	<b>E X S045 01</b>	30	818	450	420	6,1	3,3	1147	<b>336</b>	257	181	111	1,207	300
	<b>E X S050 01</b>	30	818	500	470	6,7	3,6	1249	<b>366</b>	280	198	121	1,207	400
	<b>E X S060 01</b>	30	818	600	570	7,7	4,1	1452	<b>426</b>	325	230	141	1,206	400
	<b>E X S075 01</b>	30	818	750	720	9,2	4,8	1757	<b>515</b>	393	278	171	1,206	400
<b>1118</b> H mm 1118 22 RAILS 2 SPACES	<b>E X M045 01</b>	30	1118	450	420	8,7	4,7	1639	<b>480</b>	361	251	150	1,274	400
	<b>E X M050 01</b>	30	1118	500	470	9,5	5,1	1795	<b>526</b>	397	276	165	1,265	400
	<b>E X M060 01</b>	30	1118	600	570	11,0	5,8	2105	<b>617</b>	467	326	197	1,246	400
	<b>E X M075 01</b>	30	1118	750	720	13,2	6,9	2570	<b>753</b>	574	404	247	1,219	700
<b>1462</b> H mm 1462 28 RAILS 3 SPACES	<b>E X L045 01</b>	30	1462	450	420	11,2	6,1	2106	<b>617</b>	469	330	201	1,226	400
	<b>E X L050 01</b>	30	1462	500	470	12,1	6,6	2306	<b>676</b>	514	361	220	1,226	700
	<b>E X L060 01</b>	30	1462	600	570	14,0	7,5	2706	<b>793</b>	603	424	258	1,224	700
	<b>E X L075 01</b>	30	1462	750	720	16,8	8,9	3305	<b>969</b>	737	519	316	1,221	1000
<b>1720</b> H mm 1720 34 RAILS 3 SPACES	<b>E X G045 01</b>	30	1720	450	420	13,4	7,3	2554	<b>748</b>	571	403	247	1,212	700
	<b>E X G050 01</b>	30	1720	500	470	14,6	7,9	2792	<b>818</b>	624	441	270	1,211	700
	<b>E X G060 01</b>	30	1720	600	570	16,8	9,0	3267	<b>957</b>	731	516	316	1,210	1000
	<b>E X G075 01</b>	30	1720	750	720	20,3	10,7	3979	<b>1166</b>	890	629	385	1,208	1000

01 = Standard White colour code - for different colour codes see the colour code.

X = I for connections at either end of the radiator; B for 50 mm connections

For Δt different from 50°C use the formula:  $Q=Q_n (\Delta t / 50)^n$

**Packaging include:** 1 1/2" adjustable chrome plated air vent; 3 wall brackets.

CE<sup>05</sup>  
EN442-1

EN<sup>442</sup>  
EURO NORM

**IRSAP**  
i termoarredatori