


FLAUTO 2

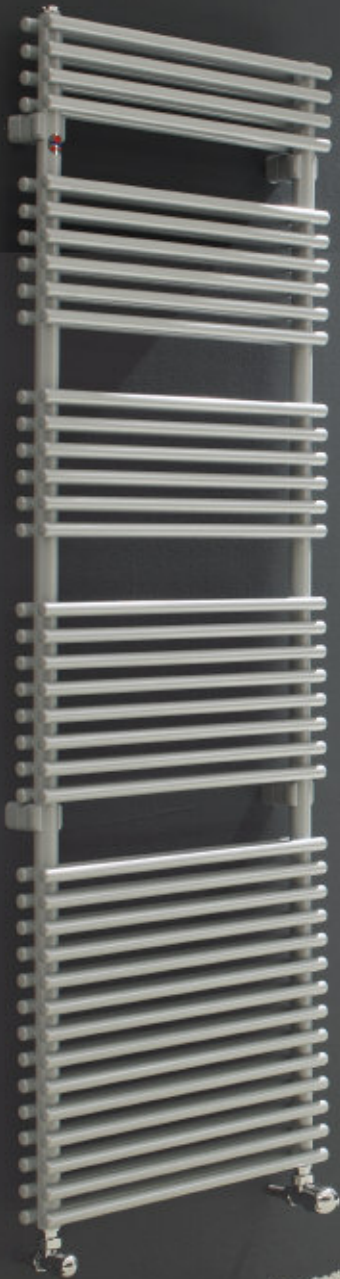

Radiator painted in Alluminum Grey RAL 9006 (cod. B4)

Bathroom radiator **FLAUTO 2**

Thanks to the double sequence of tubes, **FLAUTO 2** offers the chance to increase the heat calorie output without exceeding minimal clearances.




Radiator painted in Standard White (cod. 01)

FLAUTO 2



In photo: Flauto2 radiator. Height mm 1762, width mm 606, colour Ivory (cod. 02).

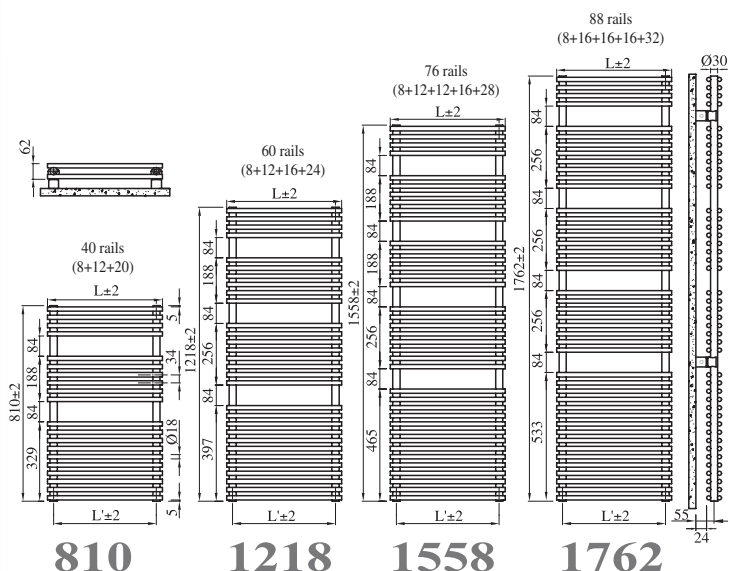

TECHNICAL SPECIFICATIONS: steel towel warmer radiator with horizontal elements featuring round tubes 18 mm diameter; side manifolds with a 30 mm round section; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

SPECIAL OPTIONS:

- 2 1/2" pipefittings welded sideways to the right manifold (the one with the air vent hole at the top). A baffle is inserted inside the manifold to improve circulation.

(*) THANKS TO THE HIGH PERFORMANCE OF IRSAP FLAUTO 2 RADIATORS, THE IDEAL Δt FOR LOW TEMPERATURE PROJECTS IS Δt AT 30°C.

| MODEL | Code | Depth P mm | Height H mm | Length L mm | Conn. centre L' mm | Weight Kg | Capacity lit | Thermal power | | | | | Expon. n. | Dual power Watt |
|--|-----------|---------------|----------------|----------------|-----------------------|--------------|-----------------|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------|--------------------|
| | | | | | | | | Δt 50°C Btu/h | Δt 50°C Watt | Δt 40°C Watt | Δt 30°C Watt | Δt 20°C Watt | | |
| 810 H mm 810 40 RAILS 2 SPACES | FDP045 01 | 62 | 810 | 456 | 406 | 10,8 | 4,4 | 1976 | 579 | 444 | 315 | 194 | 1,192 | 400 |
| | FDP050 01 | 62 | 810 | 506 | 456 | 11,8 | 4,8 | 2191 | 642 | 492 | 349 | 215 | 1,196 | 400 |
| | FDP055 01 | 62 | 810 | 556 | 506 | 12,8 | 5,2 | 2410 | 706 | 540 | 383 | 235 | 1,199 | 700 |
| | FDP060 01 | 62 | 810 | 606 | 556 | 13,7 | 5,6 | 2625 | 769 | 588 | 416 | 255 | 1,203 | 700 |
| | FDP075 01 | 62 | 810 | 756 | 706 | 16,7 | 6,7 | 3276 | 960 | 732 | 516 | 316 | 1,214 | 1000 |
| 1218 H mm 1218 60 RAILS 3 SPACES | FDM045 01 | 62 | 1218 | 456 | 406 | 16,2 | 6,6 | 2799 | 820 | 624 | 440 | 268 | 1,221 | 700 |
| | FDM050 01 | 62 | 1218 | 506 | 456 | 17,6 | 7,2 | 3109 | 911 | 694 | 488 | 298 | 1,221 | 700 |
| | FDM055 01 | 62 | 1218 | 556 | 506 | 19,1 | 7,8 | 3420 | 1002 | 763 | 537 | 328 | 1,220 | 1000 |
| | FDM060 01 | 62 | 1218 | 606 | 556 | 20,6 | 8,3 | 3730 | 1093 | 833 | 586 | 357 | 1,220 | 1000 |
| | FDM075 01 | 62 | 1218 | 756 | 706 | 25,1 | 10,1 | 4666 | 1367 | 1041 | 733 | 447 | 1,219 | 1000 |
| 1558 H mm 1558 76 RAILS 4 SPACES | FDL045 01 | 62 | 1558 | 456 | 406 | 20,5 | 8,4 | 3608 | 1057 | 803 | 563 | 342 | 1,232 | 1000 |
| | FDL050 01 | 62 | 1558 | 506 | 456 | 22,4 | 9,1 | 3986 | 1168 | 889 | 625 | 381 | 1,223 | 1000 |
| | FDL055 01 | 62 | 1558 | 556 | 506 | 24,3 | 9,9 | 4365 | 1279 | 975 | 688 | 420 | 1,215 | 1000 |
| | FDL060 01 | 62 | 1558 | 606 | 556 | 26,2 | 10,6 | 4744 | 1390 | 1062 | 751 | 460 | 1,206 | 1000 |
| | FDL075 01 | 62 | 1558 | 756 | 706 | 31,8 | 12,8 | 5881 | 1723 | 1324 | 942 | 584 | 1,181 | 1000 |
| 1762 H mm 1762 88 RAILS 4 SPACES | FDG045 01 | 62 | 1762 | 456 | 406 | 23,6 | 9,7 | 4109 | 1204 | 913 | 638 | 386 | 1,242 | 1000 |
| | FDG050 01 | 62 | 1762 | 506 | 456 | 25,8 | 10,5 | 4584 | 1343 | 1021 | 716 | 435 | 1,230 | 1000 |
| | FDG055 01 | 62 | 1762 | 556 | 506 | 28,0 | 11,4 | 5061 | 1483 | 1130 | 796 | 485 | 1,219 | 1000 |
| | FDG060 01 | 62 | 1762 | 606 | 556 | 30,2 | 12,2 | 5539 | 1623 | 1240 | 876 | 537 | 1,207 | 1000 |
| | FDG075 01 | 62 | 1762 | 756 | 706 | 36,8 | 14,7 | 6969 | 2042 | 1572 | 1122 | 697 | 1,173 | 1000 |

01 = Standard White colour code - for different colour codes see the colour code.

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Packaging include: 1 1/2" adjustable chrome plated air vent; 2 pair of CHELA wall brackets; 1 wall spacer.



130/047

CE₀₅
EN442-1

