

FLAUTO

Chromium-plated Electric



Chromium-plated radiator (cod. 50). Immersion heaters with wireless electronic control.

Bathroom Radiator **FLAUTO**

Electric Chromium-plated

Chromium-plated FLAUTO radiators are also available in an electric-only version for those situations where it is not possible, or worth-while, to connect them to the normal heating system. They are supplied complete with wall fixing kit. Power supply 230 V / 1 ph / 50 Hz, class 2, IP 44.

THE NEW WIRELESS CONTROLLER

allows complete remote management of every electric radiator function. The controller features a weekly program function that allows energy savings according to your lifestyle and routine. A different code is associated with each transmitter to avoid interference with nearby homes. Because they are wireless, the radiofrequency controllers offer the advantage of being quick and easy to install. Commands are transmitted via radio waves. The transmitter can even be placed on a piece of furniture. Because there are no wires, there is no need to carry out any modifications within the home.




FLAUTO electric

CHROME PLATED




In photo: Flauto Chromium Electric radiator. Height mm 1762, width mm 506, colour Chrome Plated (cod. 50). Electric heater with controller Wireless.

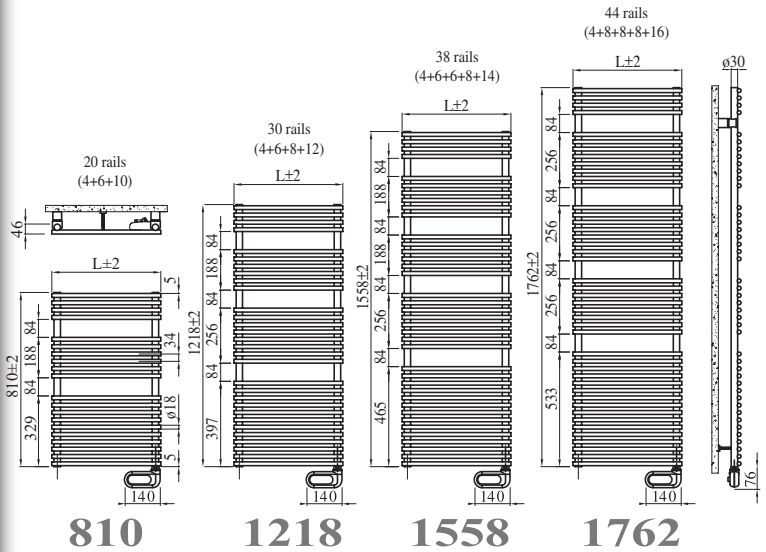

TECHNICAL SPECIFICATIONS: electric towel warmer radiator made of steel; horizontal elements with round tubes 18 mm diameter; side manifolds with a 30 mm round section; complete with thermal liquid.

MODEL	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
810 H mm 810 20 RAILS 2 SPACES	FTP050 X 01	46	810	506	9,9	300
1218 H mm 1218 30 RAILS 3 SPACES	FTM050 X 01	46	1218	506	14,7	400
1558 H mm 1558 38 RAILS 4 SPACES	FTL050 X 01	46	1558	506	18,6	600
1762 H mm 1762 44 RAILS 4 SPACES	FTG050 X 01	46	1762	506	21,3	700

CE

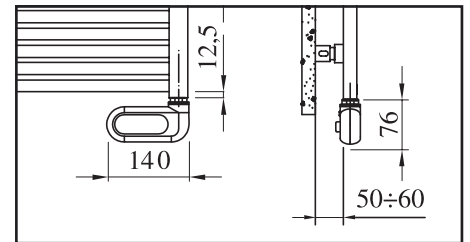

The diagrams illustrated below refer to the Flauto Chromium Electric radiator with controller Wireless; for further details regarding overall dimensions and clearances, please refer to the section planes below.

50 = Chrome colour code

X = S for electric heater with thermostatic electronic control; U for electric heater with wireless electronic control.

Packaging include: 3 CHELA wall brackets.



NEW

ELECTRIC HEATER WITH THERMOSTATIC ELECTRONIC CONTROL

Heater with inbuilt thermostat, calibrated at 90°C and safety thermal cut off calibrated at 152°C, 230 V, 1 ph, 50 Hz temperature regulator with ambient sensor, Class II insulation, IP44 protection index. The temperature sensor allows you to choose an ambient temperature between 7°C and 30°C. It also features a child safety lock.

The heater is supplied complete with an approx. 1200 mm long cable and schuko plug.



NEW

ELECTRIC HEATER WITH WIRELESS ELECTRONIC CONTROL

Wireless digital electronic control featuring weekly program. 433 MHz function frequency. ITCS (Intelligent Temperature Control System) function to ensure the exact temperature at the set time.

The heater is supplied complete with an approx. 1200 mm long cable and schuko plug.

