

# FLAUTO

*Chromium-plated*



Chromium-plated radiator (cod. 50)

## Bathroom Radiator **FLAUTO**

*Chromium-plated*

Innovative aesthetic criteria are emphasised in the **chromium-plated** version of the **FLAUTO** radiator. The charm of this version brings harmony to any bathroom environment and demonstrates how the choice of modern design and quality continues to evolve.




Chromium-plated radiator (cod. 50)

# FLAUTO chrome plated



In photo: Flauto Chrome radiator. Height mm 1762, width 606 mm, colour Chrome plated (cod. 50).

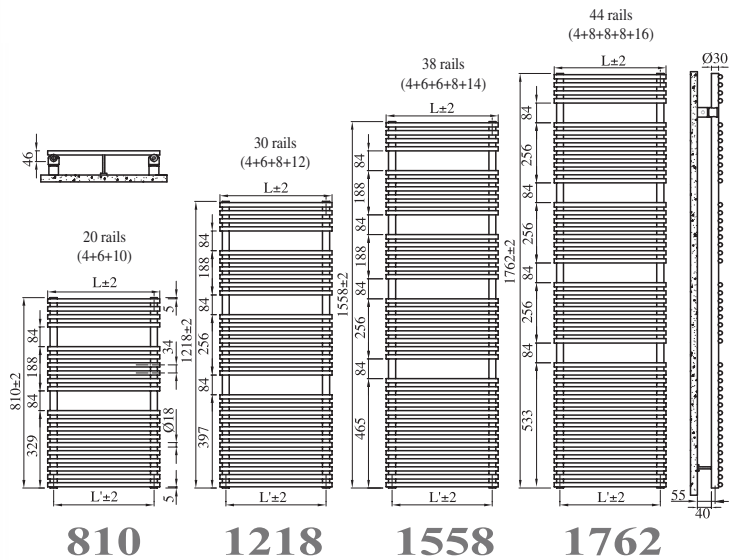

**TECHNICAL SPECIFICATIONS:** steel towel warmer radiator with horizontal elements featuring round tubes 18 mm diameter; side manifolds with a 30 mm round section; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

## SPECIAL OPTIONS:

- 2 1/2" pipefittings welded sideways to the right manifold (the one with the air vent hole at the top). A baffle is inserted inside the manifold to improve circulation.

MODEL	Code	Depth P mm	Height H mm	Length L mm	Conn. centre L' mm	Weight Kg	Capacity lt	Thermal power					Expon. n.	Dual power Watt
								Δt 50°C Btu/h	Δt 50°C Watt	Δt 40°C Watt	Δt 30°C Watt	Δt 20°C Watt		
<b>810</b> H mm 810 20 RAILS 2 SPACES	FTP045G 50	46	810	456	406	6,2	2,7	926	271	209	149	92	1,180	300
	FTP050G 50	46	810	506	456	6,7	2,9	1023	300	230	164	102	1,178	300
	FTP055G 50	46	810	556	506	7,2	3,1	1120	328	252	180	112	1,177	300
	FTP060G 50	46	810	606	556	7,7	3,2	1217	357	274	196	121	1,176	300
	FTP075G 50	46	810	756	706	9,2	3,8	1507	442	340	243	151	1,172	400
<b>1218</b> H mm 1218 30 RAILS 3 SPACES	FTM045G 50	46	1218	456	406	9,4	4,0	1360	398	303	214	130	1,220	400
	FTM050G 50	46	1218	506	456	10,1	4,3	1481	434	331	233	142	1,218	400
	FTM055G 50	46	1218	556	506	10,8	4,6	1601	469	358	252	154	1,217	400
	FTM060G 50	46	1218	606	556	11,6	4,9	1722	505	385	271	166	1,215	400
	FTM075G 50	46	1218	756	706	13,8	5,7	2084	611	466	329	202	1,209	400
<b>1558</b> H mm 1558 38 RAILS 4 SPACES	FTL045G 50	46	1558	456	406	11,9	5,1	1762	516	391	274	165	1,243	400
	FTL050G 50	46	1558	506	456	12,8	5,5	1927	565	429	301	183	1,232	400
	FTL055G 50	46	1558	556	506	13,8	5,8	2093	613	467	328	200	1,222	400
	FTL060G 50	46	1558	606	556	14,7	6,2	2259	662	505	356	218	1,212	700
	FTL075G 50	46	1558	756	706	17,5	7,3	2755	807	620	442	274	1,180	700
<b>1762</b> H mm 1762 44 RAILS 4 SPACES	FTG045G 50	46	1762	456	406	13,7	5,9	1980	580	440	307	186	1,243	400
	FTG050G 50	46	1762	506	456	14,8	6,3	2163	634	481	337	204	1,237	700
	FTG055G 50	46	1762	556	506	15,9	6,7	2346	687	522	367	223	1,230	700
	FTG060G 50	46	1762	606	556	17,0	7,1	2529	741	564	397	242	1,223	700
	FTG075G 50	46	1762	756	706	20,2	8,4	3078	902	689	488	299	1,203	1000

50 = Chrome colour code

For Δt different from 50°C use the formula:  $Q=Q_n (\Delta t / 50)^n$

**Packaging include:** 1 1/2" adjustable chrome plated air vent; 1 pair of CHELA wall brackets; 1 wall spacer.

CE 05  
EN442-1

EN 442  
EURO NORM

**IRSAP**  
i termoarredatori