

FLAUTO

Electric



Radiator painted in Standard White (cod. 01). Immersion heaters with wireless electronic control.

Bathroom Radiator **FLAUTO** *Electric*

FLAUTO radiators are also available in an electric-only version for those situations where it is not possible, or worth-while, to connect them to the normal heating system.

They are supplied complete with wall fixing kit.

Power supply 230 V / 1 ph / 50 Hz, class 2, IP 44.

THE NEW WIRELESS CONTROLLER


allows complete remote management of every electric radiator function. The controller features a weekly program function that allows energy savings according to your lifestyle and routine. A different code is associated with each transmitter to avoid interference with nearby homes. Because they are wireless, the radiofrequency controllers offer the advantage of being quick and easy to install. Commands are transmitted via radio waves. The transmitter can even be placed on a piece of furniture. Because there are no wires, there is no need to carry out any modifications within the home.



FLAUTO electric



In photo: Flauto Electric radiator. Height mm 1762, width mm 506, colour Standard White (cod. 01).
Electric heater with controller Wireless.

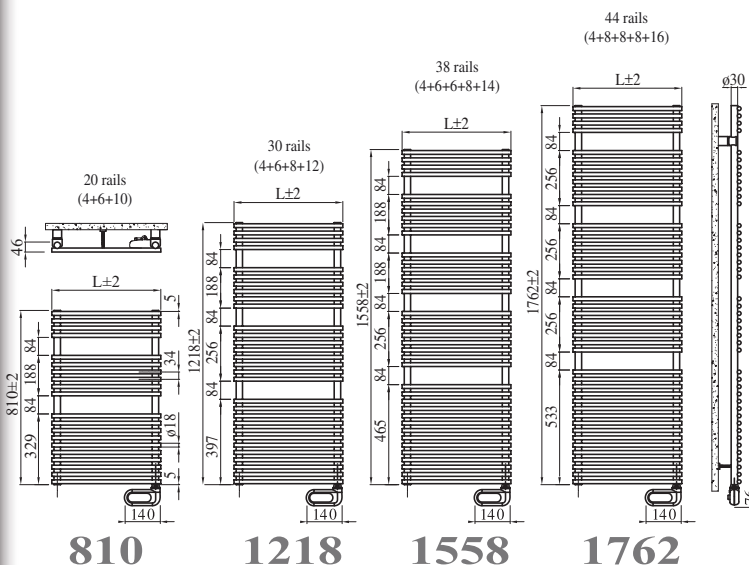


TECHNICAL SPECIFICATIONS: electric towel warmer radiator made of steel; horizontal elements with round tubes 18 mm diameter; side manifolds with a 30 mm round section; complete with thermal liquid.

MODEL	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
810 H mm 810 20 RAILS 2 SPACES	FTP050 X 01	46	810	506	10,0	400
1218 H mm 1218 30 RAILS 3 SPACES	FTM050 X 01	46	1218	506	14,7	600
1558 H mm 1558 38 RAILS 4 SPACES	FTL050 X 01	46	1558	506	18,6	800
1762 H mm 1762 44 RAILS 4 SPACES	FTG050 X 01	46	1762	506	21,4	1000

01 = Standard White colour code - for different colour codes see the colour code.

X = Y for electric heater with thermostatic electronic control; **Z** for electric heater with wireless electronic control.

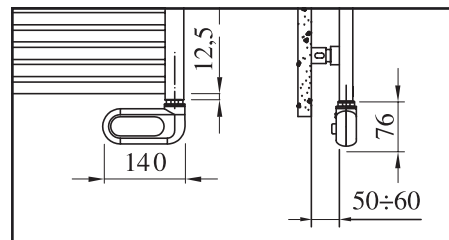

The diagrams illustrated below refer to the Flauto Electric radiator with controller Wireless; for further details regarding overall dimensions and clearances, please refer to the section planes below.

Packaging include: 3 CHELA wall brackets.



ELECTRIC HEATER WITH THERMOSTATIC ELECTRONIC CONTROL

Heater with inbuilt thermostat, calibrated at 90°C and safety thermal cut off calibrated at 152°C, 230 V, 1 ph, 50 Hz temperature regulator with ambient sensor, Class II insulation, IP44 protection index. The temperature sensor allows you to choose an ambient temperature between 7°C and 30°C. It also features a child safety lock.

The heater is supplied complete with an approx. 1200 mm long cable and schuko plug.



ELECTRIC HEATER WITH WIRELESS ELECTRONIC CONTROL

Wireless digital electronic control featuring weekly program. 433 MHz function frequency. ITCS (Intelligent Temperature Control System) function to ensure the exact temperature at the set time.

The heater is supplied complete with an approx. 1200 mm long cable and schuko plug.

