

# FLAUTO



Radiator painted in Satin Black (cod. 30)

## Bathroom radiator **FLAUTO**

The design of the **FLAUTO** towel warmer is a sign of modernity: sober, measured and offering optimum performance. **FLAUTO** is ideal for heating bathrooms.



Flauto is available also in Chromium-plated finish.


Detail of the electric heater with electronic control (a wireless version is also available). Both electric heaters can be installed as an optional for mixed radiator function.



# FLAUTO



In photo: Flauto radiator. Height mm 1762, width mm 606, colour Satin Black (cod. 30).

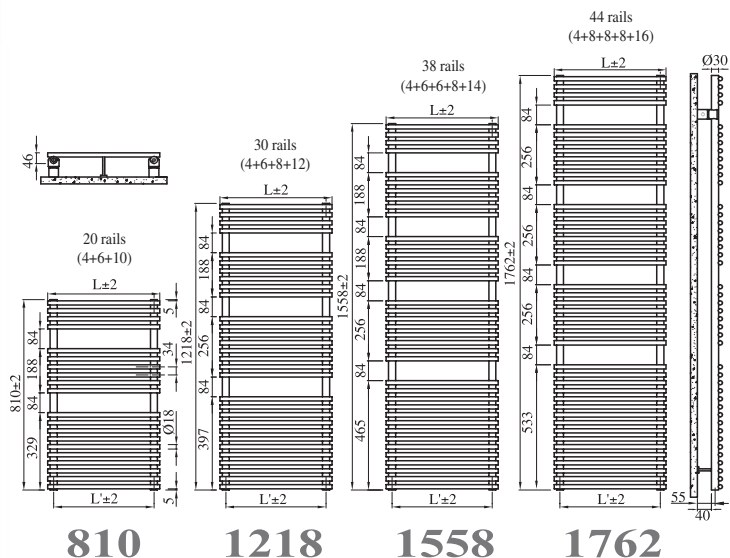

**TECHNICAL SPECIFICATIONS:** steel towel warmer radiator with horizontal elements featuring round tubes 18 mm diameter; side manifolds with a 30 mm round section; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

## SPECIAL OPTIONS:

- 2 1/2" pipefittings welded sideways to the right manifold (the one with the air vent hole at the top). A baffle is inserted inside the manifold to improve circulation.

MODEL	Code	Depth P mm	Height H mm	Length L mm	Conn. centre L' mm	Weight Kg	Capacity lt	Thermal power					Expon. n.	Dual power Watt
								Δt 50°C Btu/h	Δt 50°C Watt	Δt 40°C Watt	Δt 30°C Watt	Δt 20°C Watt		
<b>810</b> H mm 810 20 RAILS 2 SPACES	FTP045 01	46	810	456	406	6,2	2,7	1403	411	316	225	139	1,179	400
	FTP050 01	46	810	506	456	6,7	2,9	1522	446	343	244	152	1,177	400
	FTP055 01	46	810	556	506	7,2	3,1	1642	481	370	264	164	1,175	400
	FTP060 01	46	810	606	556	7,7	3,2	1765	517	398	284	176	1,173	400
	FTP075 01	46	810	756	706	9,2	3,8	2126	623	480	343	214	1,167	400
<b>1218</b> H mm 1218 30 RAILS 3 SPACES	FTM045 01	46	1218	456	406	9,4	4,0	2044	599	460	327	202	1,187	400
	FTM050 01	46	1218	506	456	10,1	4,3	2212	648	498	354	219	1,184	700
	FTM055 01	46	1218	556	506	10,8	4,6	2382	698	536	382	237	1,181	700
	FTM060 01	46	1218	606	556	11,6	4,9	2550	747	574	409	254	1,177	700
	FTM075 01	46	1218	756	706	13,8	5,7	3051	894	689	492	306	1,168	700
<b>1558</b> H mm 1558 38 RAILS 4 SPACES	FTL045 01	46	1558	456	406	11,9	5,1	2614	766	586	415	255	1,200	700
	FTL050 01	46	1558	506	456	12,8	5,5	2846	834	639	454	280	1,191	700
	FTL055 01	46	1558	556	506	13,8	5,8	3075	901	692	493	305	1,181	700
	FTL060 01	46	1558	606	556	14,7	6,2	3307	969	746	532	331	1,172	1000
	FTL075 01	46	1558	756	706	17,5	7,3	4003	1173	909	654	411	1,144	1000
<b>1762</b> H mm 1762 44 RAILS 4 SPACES	FTG045 01	46	1762	456	406	13,7	5,9	3048	893	682	482	295	1,207	700
	FTG050 01	46	1762	506	456	14,8	6,3	3294	965	739	523	322	1,199	1000
	FTG055 01	46	1762	556	506	15,9	6,7	3536	1036	794	564	348	1,190	1000
	FTG060 01	46	1762	606	556	17,0	7,1	3785	1109	852	607	376	1,181	1000
	FTG075 01	46	1762	756	706	20,2	8,4	4519	1324	1023	734	459	1,155	1000

01 = Standard White colour code - for different colour codes see the colour code.

For Δt different from 50°C use the formula:  $Q=Q_n (\Delta t / 50)^n$

**Packaging include:** 1 1/2" adjustable chrome plated air vent; 1 pair of CHELA wall brackets; 1 wall spacer.



130/047

