

KART



Radiator painted in Standard White (cod. 01)

Bathroom radiator **KART**

The **KART** line is synonymous with functionality and solidity. Thanks to its excellent performance, Kart is suitable for use in large bathrooms. The ample space between the tubes allows perfect use as a towel-warmer.



Detail of the manifold and the tubes.


Detail of the electric heater with electronic control (a wireless version is also available). Both electric heaters can be installed as an optional for mixed radiator function.



KART



In photo: Kart radiator. Height mm 1112, width mm 500, colour Standard White (cod. 01).

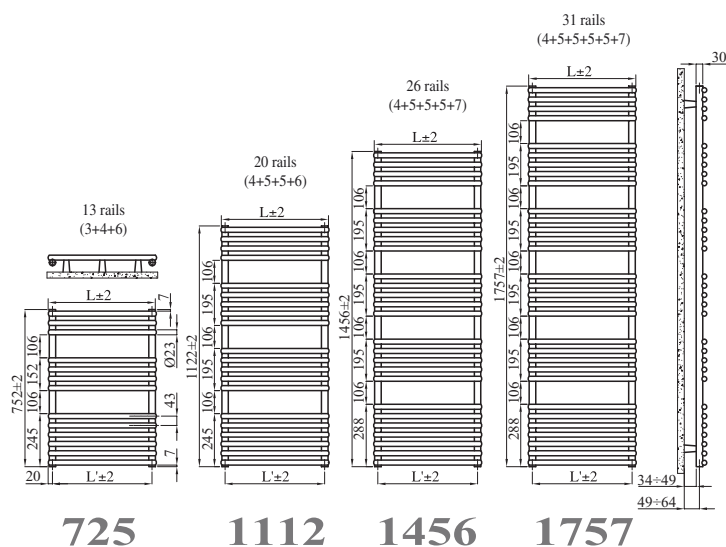

TECHNICAL SPECIFICATIONS: steel towel warmer radiator with horizontal elements featuring round tubes 23 mm diameter; side manifolds with a 30 mm round section; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

SPECIAL OPTIONS:

- 2 1/2" pipefittings welded sideways to the right manifold (the one with the air vent hole at the top). A baffle is inserted inside the manifold to improve circulation.

| MODEL | Code | Depth P mm | Height H mm | Length L mm | Conn. centre L' mm | Weight Kg | Capacity lt | Thermal power | | | | | Expon. n. | Dual power Watt |
|--|-----------|---------------|----------------|----------------|-----------------------|--------------|----------------|------------------|-----------------|-----------------|-----------------|-----------------|--------------|--------------------|
| | | | | | | | | Δt 50°C Btu/h | Δt 50°C Watt | Δt 40°C Watt | Δt 30°C Watt | Δt 20°C Watt | | |
| 725 H mm 725 13 RAILS 2 SPACES | KAS050 01 | 49 | 725 | 500 | 460 | 5,1 | 3,1 | 1103 | 323 | 248 | 136 | 46 | 1,179 | 400 |
| | KAS060 01 | 49 | 725 | 600 | 560 | 5,8 | 3,5 | 1275 | 373 | 287 | 157 | 53 | 1,177 | 400 |
| | KAS075 01 | 49 | 725 | 750 | 710 | 6,8 | 4,2 | 1532 | 449 | 345 | 189 | 65 | 1,175 | 400 |
| 1112 H mm 1112 20 RAILS 3 SPACES | KAM050 01 | 49 | 1112 | 500 | 460 | 7,8 | 4,7 | 1648 | 483 | 371 | 202 | 68 | 1,187 | 400 |
| | KAM060 01 | 49 | 1112 | 600 | 560 | 8,9 | 5,4 | 1898 | 556 | 427 | 233 | 79 | 1,184 | 700 |
| | KAM075 01 | 49 | 1112 | 750 | 710 | 10,5 | 6,5 | 2274 | 666 | 512 | 280 | 95 | 1,181 | 700 |
| 1456 H mm 1456 26 RAILS 4 SPACES | KAL050 01 | 49 | 1456 | 500 | 460 | 10,1 | 6,2 | 2170 | 636 | 487 | 264 | 88 | 1,200 | 700 |
| | KAL060 01 | 49 | 1456 | 600 | 560 | 11,5 | 7,1 | 2497 | 732 | 561 | 305 | 103 | 1,191 | 700 |
| | KAL075 01 | 49 | 1456 | 750 | 710 | 13,7 | 8,4 | 2974 | 871 | 669 | 366 | 124 | 1,181 | 1000 |
| 1757 H mm 1757 31 RAILS 5 SPACES | KAE050 01 | 49 | 1757 | 500 | 460 | 12,1 | 7,4 | 2617 | 767 | 586 | 316 | 105 | 1,207 | 1000 |
| | KAE060 01 | 49 | 1757 | 600 | 560 | 13,8 | 8,4 | 3006 | 881 | 674 | 365 | 122 | 1,199 | 1000 |
| | KAE075 01 | 49 | 1757 | 750 | 710 | 16,3 | 10,1 | 3593 | 1053 | 807 | 440 | 148 | 1,190 | 1000 |

01 = Standard White colour code - for different colour codes see the colour code.

Heat yields are estimated and are undergoing certification. Power calculated with Δt 50°C.
For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$.

Packaging include: 1 1/2" adjustable chrome plated air vent; 3 wall brackets.

