

OFFICINA DELLE IDEE



Chromium-Plated Tolé (cod. 50)

tolé Chromium-Plated

The incisive cut and the net stamp make TOLÉ a radiator with a design that is creative, powerful and sought-after. The radiating elements made of CHROMIUM-PLATED BRASS outline an utterly original, techno-logical, light and new geometry, which conquers the space it occupies with its decided and modern personality.




Chromium-Plated Tolé (cod. 50)

TOLÉ chromium-plated



In photo: Tolé radiator. Height mm 1902, width mm 481, Chromium-plated (cod. 50).

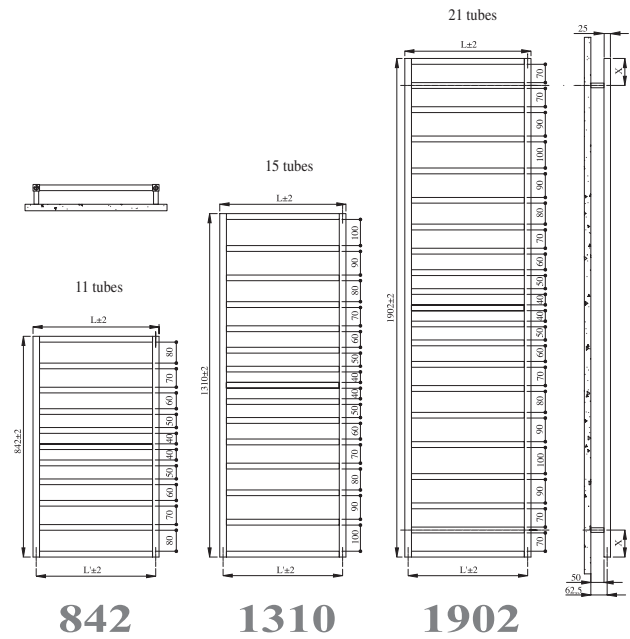

Packing included:

- 1 angle pattern valve and lockshield valve assembly complete with copper fitting (diameters: 12, 14, 15 mm);
- 1 air vent 1/2" chromium-plated;
- 4 chrome-plated brass spacer complete with grub screws.

TECHNICAL SPECIFICATIONS:

Chrome plated brass towel warmer radiator.

- Horizontal elements with tubes featuring a 22x22 mm square section.
- Side manifolds with a 25x25 mm square section.
- 1/2" Gas right threading.
- Maximum working pressure 4 bar.
- Maximum working temperature 95°C.

| MODEL | Code | Depth P mm | Height H mm | Width L mm | Con. Centre L'mm | Weight Kg | Capacity lt | Thermal Power | | | | | Expon. n. | Mix. Function Watt |
|--------------------------------------|-----------|---------------|----------------|---------------|---------------------|--------------|----------------|------------------|-----------------|-----------------|-----------------|-----------------|--------------|-----------------------|
| | | | | | | | | Δt 50°C Btu/h | Δt 50°C Watt | Δt 40°C Watt | Δt 30°C Watt | Δt 20°C Watt | | |
| 842 H mm 842 11 RAILS | TLP048 50 | 44,5 | 842 | 481 | 456 | 9,7 | 2,0 | 646 | 189 | 143 | 100 | 60 | 1,250 | - |
| | TLP058 50 | 44,5 | 842 | 581 | 556 | 11,0 | 2,3 | 764 | 224 | 170 | 119 | 72 | 1,237 | - |
| 1310 H mm 1310 15 RAILS | TLM048 50 | 44,5 | 1310 | 481 | 456 | 13,9 | 2,9 | 962 | 282 | 214 | 150 | 91 | 1,236 | 300 |
| | TLM058 50 | 44,5 | 1310 | 581 | 556 | 15,7 | 3,4 | 1108 | 325 | 247 | 173 | 105 | 1,234 | 300 |
| 1902 H mm 1902 21 RAILS | TLG048 50 | 44,5 | 1902 | 481 | 456 | 19,3 | 4,1 | 1400 | 410 | 311 | 217 | 131 | 1,248 | 400 |
| | TLG058 50 | 44,5 | 1902 | 581 | 556 | 21,8 | 4,7 | 1618 | 474 | 359 | 251 | 151 | 1,248 | 400 |

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Tolé can be connected to the heating or domestic hot water system.

