

# VELA

*Electric*



Radiator painted in Edelweiss Opaque White (cod. 34). Immersion heaters with electronic control.

## Bathroom Radiator **VELA** *Electric*

**VELA** radiators are also available in an electric-only version for those situations where it is not possible, or worthwhile, to connect them to the normal heating system. They are supplied complete with wall fixing kit. Power supply 230 V / 1 ph / 50 Hz, class 2, IP 44.

### **THE NEW WIRELESS CONTROLLER**


allows complete remote management of every electric radiator function. The controller features a weekly program function that allows energy savings according to your lifestyle and routine. A different code is associated with each transmitter to avoid interference with nearby homes. Because they are wireless, the radiofrequency controllers offer the advantage of being quick and easy to install. Commands are transmitted via radio waves. The transmitter can even be placed on a piece of furniture. Because there are no wires, there is no need to carry out any modifications within the home.



# VELA electric



In photo: Vela Electric radiator. Height mm 1820, width mm 560, colour Standard White (cod. 01). Electric heater with controller Wireless.

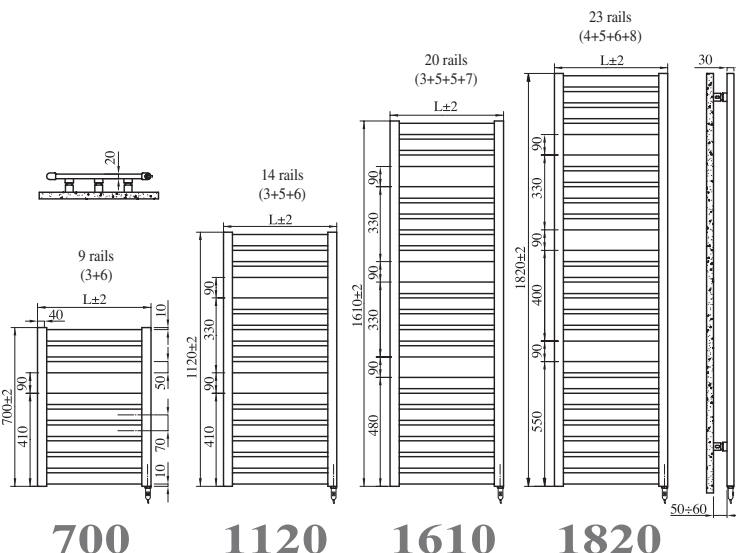

**TECHNICAL SPECIFICATIONS:** electric towel warmer radiator made of steel; horizontal elements with oval tubes 50x20 mm diameter; side manifolds with a 40x30 mm semioval section; complete with thermal liquid.

MODEL	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
<b>700</b> H mm 700 9 RAILS 1 SPACE	<b>VES056 X 01</b>	30	700	560	12,5	400
<b>1120</b> H mm 1120 14 RAILS 2 SPACES	<b>VEM056 X 01</b>	30	1120	560	19,3	400
<b>1610</b> H mm 1610 20 RAILS 3 SPACES	<b>VEL056 X 01</b>	30	1610	560	27,4	700
<b>1820</b> H mm 1820 23 RAILS 3 SPACES	<b>VEE056 X 01</b>	30	1820	560	30,9	1000

**01 = Standard White colour code** - for different colour codes see the colours page.

**X = I** for electric heater with switch control; **Y** for electric heater with thermostatic electronic control; **Z** for electric heater with wireless electronic control.

**Packaging include:** 3 CHELA wall brackets.



#### ELECTRIC HEATER WITH SWITCH CONTROL

Heater with inbuilt thermostat, calibrated at 70÷75°C and safety thermal cut off calibrated at 104°C, 230 V, 1 ph, 50 Hz with earth clamp, Class I insulation, IP54 protection index. The heater is supplied complete with an approx. 1200 mm long cable and schuko plug.



#### ELECTRIC HEATER WITH THERMOSTATIC ELECTRONIC CONTROL


Heater with inbuilt thermostat, calibrated at 90°C and safety thermal cut off calibrated at 152°C, 230 V, 1 ph, 50 Hz temperature regulator with ambient sensor, Class II insulation, IP 44 protection index.

The temperature sensor allows you to choose an ambient temperature between 7°C and 30°C. It also features a child safety lock. The heater is supplied complete with an approx. 1200 mm long cable and schuko plug.



#### ELECTRIC HEATER WITH WIRELESS ELECTRONIC CONTROL

Wireless digital electronic control featuring weekly program. 433 MHz function frequency. ITCS (Intelligent Temperature Control System) function to ensure the exact temperature at the set time. The heater is supplied complete with an approx. 1200 mm long cable and schuko plug.

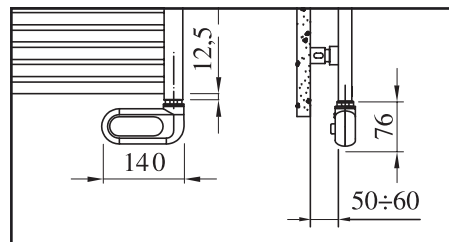

The diagrams illustrated below refer to the Vela Electric radiator with a controller Wireless; for further details regarding overall dimensions and clearances, please refer to the section planes below.