

# VENUS

*Chromium-plated*




Chromium-plated radiator (cod. 50)

## Bathroom Radiator **VENUS**

*Chromium-plated*

**Chromium-plated** version of the **VENUS** radiator. Its essential line and the modernity of the chromium-plating make VENUS an aesthetically innovative towel warmer. Particularly suited for installation in environments where there is little available space, **Chromium-plated VENUS** meets the design requirements of the home of today.



Venus is available also in Standard White version.


Detail of the electric heater with electronic control (a wireless version is also available). Both electric heaters can be installed as an optional for mixed radiator function.



# VENUS chrome plated

L	P	R	M1	M2
497	45	1300	47÷62	62÷77
595	55	1300	42÷57	56÷71
740	74	1300	29÷44	44÷59

VENUS chrome 50 mm

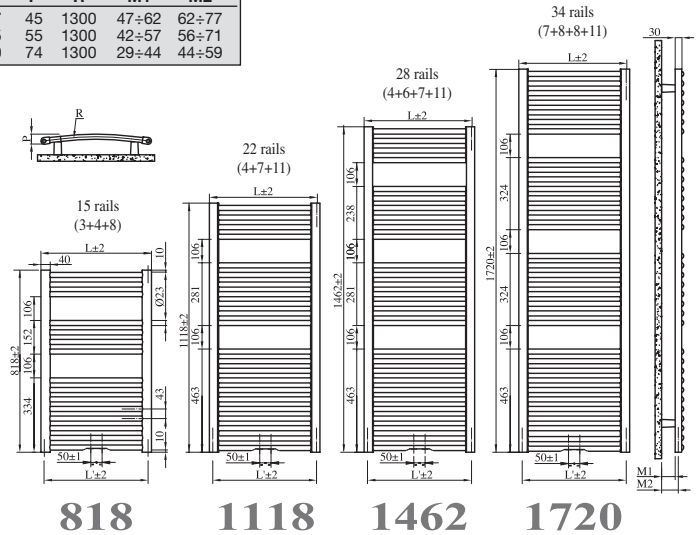

**TECHNICAL SPECIFICATIONS:** steel towel warmer radiator with horizontal elements featuring round tubes with a 23 mm diameter; side manifolds with a 40x30 mm semioval section; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

In photo: Venus Chrome Plated radiator. Height mm 1720, width mm 595, colour Chrome plated (cod. 50).

MODEL	Code	Depth P mm	Height H mm	Length L mm	Conn. centre L' mm	Weight Kg	Capacity lt	Thermal power					Expon. n.	Dual power Watt
								Δt 50°C Btu/h	Δt 50°C Watt	Δt 40°C Watt	Δt 30°C Watt	Δt 20°C Watt		
<b>818</b> H mm 818 15 RAILS 2 SPACES	M X S045 50	41	818	448	418	3,3	6,1	747	219	165	114	68	1,269	-
	M X S050 50	45	818	497	467	3,6	6,6	815	239	180	125	75	1,266	-
	M X S060 50	55	818	595	565	4,1	7,6	951	279	210	147	88	1,258	300
	M X S075 50	74	818	740	710	4,8	9,1	1155	339	256	179	108	1,247	300
<b>1118</b> H mm 1118 22 RAILS 2 SPACES	M X M045 50	41	1118	448	418	4,7	8,7	1077	316	238	166	100	1,259	300
	M X M050 50	45	1118	497	467	5,1	9,4	1182	346	262	182	109	1,257	400
	M X M060 50	55	1118	595	565	5,8	10,9	1392	408	308	215	129	1,253	400
	M X M075 50	74	1118	740	710	6,8	13,0	1707	500	379	265	160	1,246	400
<b>1462</b> H mm 1462 28 RAILS 3 SPACES	M X L045 50	41	1462	448	418	6,1	11,2	1373	402	305	213	129	1,245	400
	M X L050 50	45	1462	497	467	6,5	12,1	1509	442	335	234	141	1,247	400
	M X L060 50	55	1462	595	565	7,4	13,9	1781	522	395	276	166	1,249	400
	M X L075 50	74	1462	740	710	8,8	16,6	2188	641	485	338	203	1,254	700
<b>1720</b> H mm 1720 34 RAILS 3 SPACES	M X G045 50	41	1720	448	418	7,3	13,4	1670	489	370	258	156	1,251	400
	M X G050 50	45	1720	497	467	7,8	14,5	1837	538	407	284	171	1,250	400
	M X G060 50	55	1720	595	565	8,9	16,7	2172	636	482	336	203	1,249	700
	M X G075 50	74	1720	740	710	10,6	20,0	2674	783	593	414	250	1,246	700

50 = Chrome colour code

X = I for connections at either end of the radiator; H for 50 mm connections

For Δt different from 50°C use the formula:  $Q=Q_n (\Delta t / 50)^n$

**Packaging include:** 1 1/2" adjustable chrome plated air vent; 4 chrome wall brackets.

CE<sup>05</sup>  
EN442-1

EN<sup>442</sup>  
EURO NORM

**IRSAP**  
i termoarredatori