

XILO 2



Radiator painted in Greenwich Green (cod. B4)

Bathroom radiator XILO 2

XILO 2 is available for high heat yield demands, characterised by a double sequence of tubes welded to the sides of the manifold.



Detail of original IRSAP design lockshield valve


Detail of original IRSAP design valve



XILO 2



In photo: Radiator Xilo 2. Height 1152 mm, width 606 mm, colour Natural Beige (cod. 38).

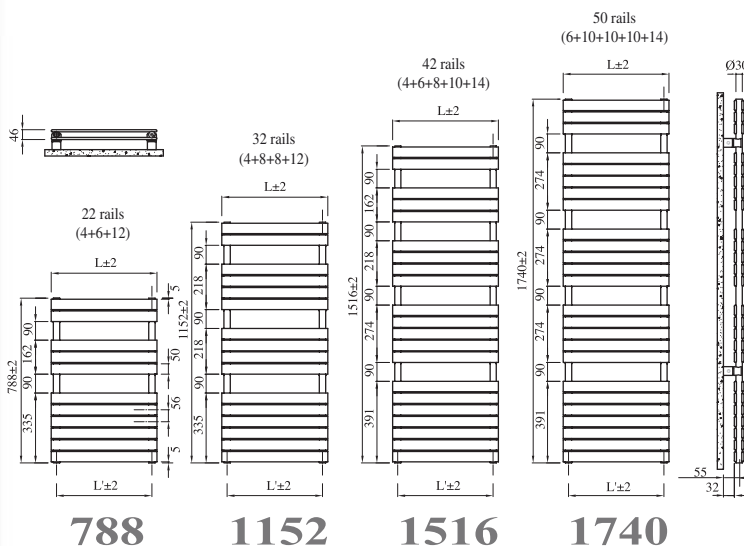

TECHNICAL SPECIFICATIONS: steel towel warmer radiator with horizontal elements featuring 50x10 mm flats tubes; side manifolds with a 30 mm round section; manifold threading 1/2" Gas right; maximum working pressure 4 bar; maximum working temperature 95°C.

SPECIAL OPTIONS:

- 2 1/2" pipefittings welded sideways to the right manifold (the one with the air vent hole at the top). A baffle is inserted inside the manifold to improve circulation.

(*) THANKS TO THE HIGH PERFORMANCE OF IRSAP XILO2 RADIATORS, THE IDEAL Δt FOR LOW TEMPERATURE PROJECTS IS Δt AT 30°C.

| MODEL | Code | Depth P mm | Height H mm | Length L mm | Conn. centre L' mm | Weight Kg | Capacity lit | Thermal power | | | | | Expon. n. | Dual power Watt |
|--|-----------|---------------|----------------|----------------|-----------------------|--------------|-----------------|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------|--------------------|
| | | | | | | | | Δt 50°C Btu/h | Δt 50°C Watt | Δt 40°C Watt | Δt 30°C Watt | Δt 20°C Watt | | |
| 788 H mm 788 22 RAILS 2 SPACES | X2P045 01 | 46 | 788 | 456 | 406 | 11,7 | 4,4 | 1819 | 533 | 409 | 290 | 179 | 1,192 | 400 |
| | X2P050 01 | 46 | 788 | 506 | 456 | 12,8 | 4,8 | 1986 | 582 | 446 | 317 | 196 | 1,189 | 400 |
| | X2P055 01 | 46 | 788 | 556 | 506 | 13,9 | 5,2 | 2154 | 631 | 484 | 344 | 213 | 1,186 | 400 |
| | X2P060 01 | 46 | 788 | 606 | 556 | 15,0 | 5,6 | 2321 | 680 | 522 | 371 | 230 | 1,184 | 700 |
| | X2P075 01 | 46 | 788 | 756 | 706 | 18,3 | 6,7 | 2822 | 827 | 636 | 454 | 282 | 1,175 | 700 |
| 1152 H mm 1152 32 RAILS 3 SPACES | X2M045 01 | 46 | 1152 | 456 | 406 | 17,0 | 6,4 | 2475 | 725 | 555 | 393 | 242 | 1,198 | 700 |
| | X2M050 01 | 46 | 1152 | 506 | 456 | 18,6 | 7,0 | 2710 | 794 | 608 | 431 | 266 | 1,195 | 700 |
| | X2M055 01 | 46 | 1152 | 556 | 506 | 20,2 | 7,5 | 2945 | 863 | 661 | 470 | 290 | 1,191 | 700 |
| | X2M060 01 | 46 | 1152 | 606 | 556 | 21,8 | 8,1 | 3180 | 932 | 715 | 508 | 314 | 1,187 | 700 |
| | X2M075 01 | 46 | 1152 | 756 | 706 | 26,6 | 9,8 | 3885 | 1138 | 875 | 624 | 387 | 1,177 | 1000 |
| 1516 H mm 1516 42 RAILS 4 SPACES | X2L045 01 | 46 | 1516 | 456 | 406 | 22,3 | 8,4 | 3041 | 891 | 673 | 468 | 281 | 1,259 | 700 |
| | X2L050 01 | 46 | 1516 | 506 | 456 | 24,4 | 9,2 | 3330 | 976 | 739 | 516 | 311 | 1,247 | 1000 |
| | X2L055 01 | 46 | 1516 | 556 | 506 | 26,5 | 9,9 | 3621 | 1061 | 805 | 565 | 342 | 1,234 | 1000 |
| | X2L060 01 | 46 | 1516 | 606 | 556 | 28,6 | 10,6 | 3910 | 1146 | 872 | 614 | 374 | 1,222 | 1000 |
| | X2L075 01 | 46 | 1516 | 756 | 706 | 34,9 | 12,8 | 4780 | 1401 | 1075 | 765 | 473 | 1,184 | 1000 |
| 1740 H mm 1740 50 RAILS 4 SPACES | X2G045 01 | 46 | 1740 | 456 | 406 | 26,5 | 9,7 | 3384 | 992 | 750 | 524 | 315 | 1,250 | 1000 |
| | X2G050 01 | 46 | 1740 | 506 | 456 | 28,6 | 10,8 | 3735 | 1094 | 830 | 581 | 351 | 1,240 | 1000 |
| | X2G055 01 | 46 | 1740 | 556 | 506 | 31,5 | 11,7 | 4086 | 1197 | 910 | 638 | 388 | 1,231 | 1000 |
| | X2G060 01 | 46 | 1740 | 606 | 556 | 34,0 | 12,6 | 4437 | 1300 | 990 | 697 | 425 | 1,221 | 1000 |
| | X2G075 01 | 46 | 1740 | 756 | 706 | 41,5 | 15,2 | 5489 | 1608 | 1233 | 875 | 539 | 1,193 | 1000 |

01 = Standard White colour code - for different colour codes see the colour code.

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Packaging include: 1 1/2" adjustable chrome plated air vent; 2 pairs of CHELA wall brackets; 1 wall spacer.



130/047

CE₀₅
EN442-1

