

# XILO



Radiator painted in Titanium Grey Metallic RAL 9023 (cod. L3)

## Bathroom radiator **XILO**

The **XILO** towel warmer is made of flat steel tubes and provides a high heat yield with a minimum water content. Its discreet and elegant presence ensures it blends perfectly with any bathroom interior design.



Detail of original IRSAP design lockshield valve




Detail of original IRSAP design valve

# XILO



In photo: Xilo radiator. Height mm 1152, width 556 mm, colour Standard White (cod. 01).

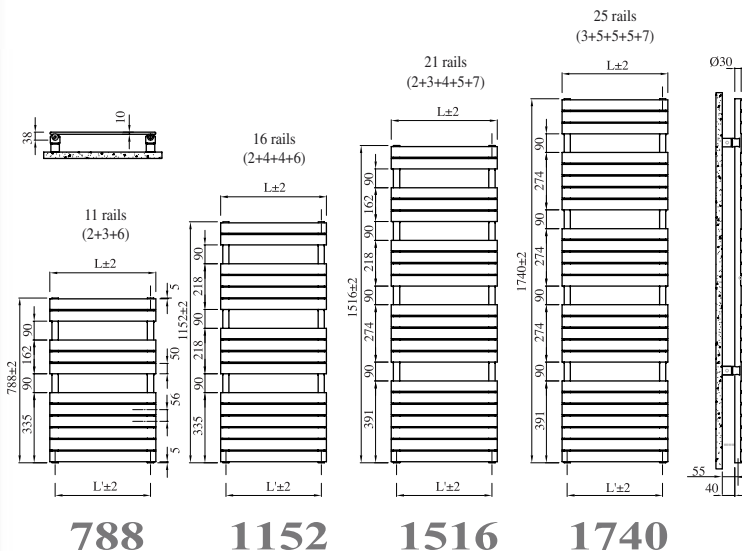

**TECHNICAL SPECIFICATIONS:** steel towel warmer radiator with horizontal elements featuring 50x10 mm flats tubes; side manifolds with a 30 mm round section; manifold threading 1/2" Gas right; maximum working pressure 4 bar; maximum working temperature 95°C.

## SPECIAL OPTIONS:

- 2 1/2" pipefittings welded sideways to the right manifold (the one with the air vent hole at the top). A baffle is inserted inside the manifold to improve circulation.

MODEL	Code	Depth P mm	Height H mm	Length L mm	Conn. centre L' mm	Weight Kg	Capacity lt	Thermal power					Expon. n.	Dual power Watt
								Δt 50°C Btu/h	Δt 50°C Watt	Δt 40°C Watt	Δt 30°C Watt	Δt 20°C Watt		
<b>788</b> H mm 788 11 RAILS 2 SPACES	XOP045 01	38	788	456	406	6,7	2,7	1287	<b>377</b>	288	204	126	1,200	400
	XOP050 01	38	788	506	456	7,3	2,8	1407	<b>412</b>	315	223	137	1,199	400
	XOP055 01	38	788	556	506	7,8	3,0	1527	<b>447</b>	342	243	149	1,198	400
	XOP060 01	38	788	606	556	8,3	3,2	1647	<b>483</b>	369	262	161	1,197	400
	XOP075 01	38	788	756	706	10,0	3,8	2007	<b>588</b>	450	319	197	1,195	400
<b>1152</b> H mm 1152 16 RAILS 3 SPACES	XOM045 01	38	1152	456	406	9,7	3,9	1732	<b>507</b>	390	278	172	1,180	400
	XOM050 01	38	1152	506	456	10,5	4,1	1903	<b>558</b>	429	305	189	1,178	400
	XOM055 01	38	1152	556	506	11,3	4,4	2073	<b>608</b>	467	333	207	1,177	400
	XOM060 01	38	1152	606	556	12,1	4,7	2244	<b>658</b>	506	361	224	1,175	400
	XOM075 01	38	1152	756	706	14,5	5,5	2757	<b>808</b>	622	444	276	1,170	700
<b>1516</b> H mm 1516 21 RAILS 4 SPACES	XOL045 01	38	1516	456	406	12,8	5,1	2230	<b>654</b>	498	351	215	1,214	400
	XOL050 01	38	1516	506	456	13,8	5,4	2452	<b>718</b>	549	388	238	1,205	700
	XOL055 01	38	1516	556	506	14,9	5,8	2673	<b>783</b>	600	425	262	1,195	700
	XOL060 01	38	1516	606	556	15,9	6,2	2895	<b>848</b>	651	463	286	1,186	700
	XOL075 01	38	1516	756	706	19,1	7,3	3559	<b>1043</b>	805	577	361	1,157	1000
<b>1740</b> H mm 1740 25 RAILS 4 SPACES	XOG045 01	38	1740	456	406	15,1	6,0	2613	<b>766</b>	588	418	258	1,185	700
	XOG050 01	38	1740	506	456	16,3	6,4	2864	<b>839</b>	644	459	284	1,182	700
	XOG055 01	38	1740	556	506	17,6	6,8	3114	<b>912</b>	701	500	310	1,179	700
	XOG060 01	38	1740	606	556	18,8	7,3	3365	<b>986</b>	758	541	336	1,176	1000
	XOG075 01	38	1740	756	706	22,6	8,6	4116	<b>1206</b>	930	665	414	1,167	1000

01 = Standard White colour code - for different colour codes see the colour code.

For Δt different from 50°C use the formula:  $Q=Q_n (\Delta t / 50)^n$

**Packaging include:** 1 1/2" adjustable chrome plated air vent; 1 pair of CHELA wall brackets; 1 wall spacer.



130/047

