

ARPA 2



Radiator painted in Graphite Black (cod. 18)

Interior Design Radiator **ARPA 2**

For higher cubic capacities and to produce the necessary heat calories, **ARPA 2** features a double sequence of tubes welded on the side of the manifold. Style and practicality go harmoniously hand in hand in **ARPA 2**. Available in heights ranging from 520 to 2520 mm and widths from 4 to 40 sections in even numbers.




Detail of radiator painted in Standard White (cod. 01)

ARPA 2



In photo: Arpa2 radiator. Height mm 2020, 16 elements, colour Standard White (cod. 01).

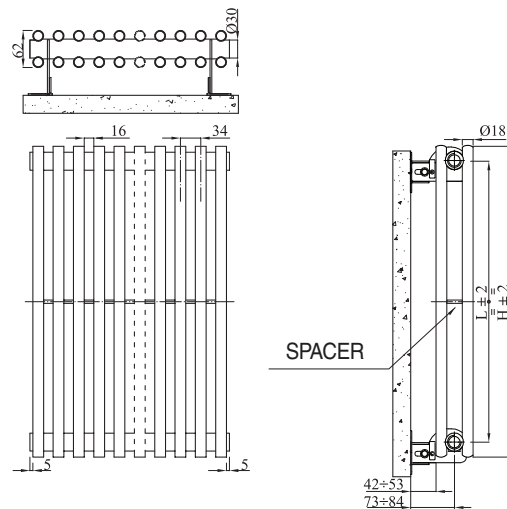

TECHNICAL SPECIFICATIONS: depth 62 mm and manifolds with a 30 mm diameter circular section; tubes made of sheet steel with an 18 mm diameter; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

(*) THANKS TO THE HIGH PERFORMANCE OF IRSAP ARPA2 RADIATORS, THE IDEAL Δt FOR LOW TEMPERATURE PROJECTS IS Δt AT 30°C.

MOD.	Code	Depth P mm	Height H mm	Conn. centre H' mm	Weight Kg	Capacity lt	Thermal Power					Expon. n.
							Δt 50°C Btu/h	Δt 50°C Watt	Δt 40°C Watt	Δt 30°C(*) Watt	Δt 20°C Watt	
520	A2x0520 yy 01	62	520	470	0,59	0,24	118,0	34,6	25,9	17,9	10,6	1,291
700	A2x0700 yy 01	62	700	650	0,77	0,31	156,9	46,0	34,5	23,8	14,1	1,291
920	A2x0920 yy 01	62	920	870	0,99	0,39	202,5	59,3	44,5	30,7	18,2	1,290
1520	A2x1520 yy 01	62	1520	1470	1,58	0,62	315,8	92,5	69,4	47,9	28,4	1,289
1820	A2x1820 yy 01	62	1820	1770	1,88	0,73	366,5	107,4	80,6	55,6	33,0	1,288
2020	A2x2020 yy 01	62	2020	1970	2,08	0,81	398,1	116,7	87,5	60,3	35,7	1,291
2520	A2x2520 yy 01	62	2520	2470	2,58	1,00	470,1	137,7	103,1	71,0	41,9	1,298

01 = Standard White colour code - for different colour codes see the colour card.

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Packaging include: fixing brackets complete with screws and anchors, 1/2" chromium plated air vent, 1/2" chromium plated blind plug.

yy = number of elements
x = figure corresponding to the n° of elements



CE₀₅
EN442-1



130/047

Special Options

The pipefittings welded on the bottom manifold can be positioned at any point at a specified distance between centres. **It is compulsory in this type of installation to install a diaphragm during production to ensure the product functions correctly.**

The **minimum** possible distance between centres is equal to 50 mm (see fig. 2), while the **maximum** distance between centres depends on the length of the radiator. The **maximum** distance between centres can be $H' = 34 \times (\text{n° of elements} - 2)$ (see fig. 1).

