

ARPA

Chromium-plated



Chromium-plated radiator (cod. 50)

Interior Design Radiator **ARPA**

Chromium-plated

Chromium plated ARPA renews the image of the radiator. Thanks to essence of its shapes, its slender and graceful lines, the **Chromium plated ARPA** transforms space, highlighting its balanced and refined design.

Available in heights ranging from 520 to 920 mm and lengths from 4 to 40 sections in even numbers and in heights ranging from 1520 to 2520 mm and lengths from 4 to 28 sections in even numbers.




Chromium-plated radiator (cod. 50)

ARPA chrome plated



In photo: Arpa Chrome plated radiator. Height mm 2020, 10 elements, colour Chromium (cod. 50).

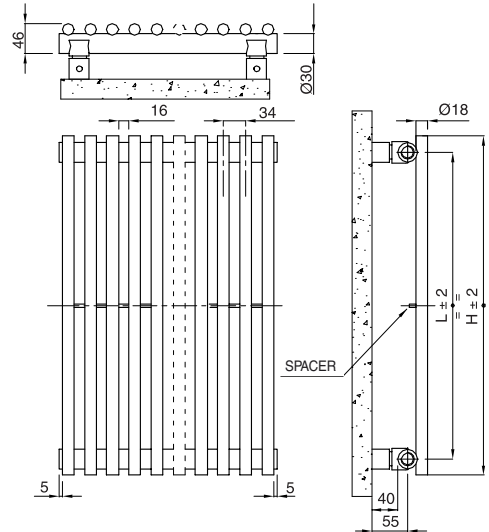

TECHNICAL SPECIFICATIONS: depth 46 mm and manifolds with a 30 mm diameter circular section; tubes made of sheet steel with an 18 mm diameter; manifold threading 1/2" Gas right; maximum working pressure 8 bar; maximum working temperature 95°C.

MOD.	Code	Depth P mm	Height H mm	Conn. centre H' mm	Weight Kg	Capacity lt	Thermal Power					Expon. n.
							Δt 50°C Btu/h	Δt 50°C Watt	Δt 40°C Watt	Δt 30°C Watt	Δt 20°C Watt	
520	A1x0520 yy 50	46	520	470	0,33	0,14	47,4	13,9	10,6	7,5	4,6	1,218
700	A1x0700 yy 50	46	700	650	0,42	0,17	61,8	18,1	13,7	9,6	5,8	1,242
920	A1x0920 yy 50	46	920	870	0,53	0,21	79,5	23,3	17,5	12,2	7,3	1,271
1520	A1x1520 yy 50	46	1520	1470	0,83	0,33	127,3	37,3	28,0	19,4	11,6	1,279
1820	A1x1820 yy 50	46	1820	1770	0,98	0,39	152,2	44,6	33,5	23,2	13,8	1,284
2020	A1x2020 yy 50	46	2020	1970	1,08	0,42	168,9	49,5	37,2	25,7	15,3	1,285
2520	A1x2520 yy 50	46	2520	2470	1,32	0,52	212,3	62,2	46,7	32,2	19,1	1,287

CE 05
EN442-1

EURO NORM
EN 442

50 = Chrome colour code

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$


Packaging include: "Chela" fixing wall complete with screws and anchors, 1/2" chromium plated air vent, 1/2" chromium plated blind plug.

yy = number of elements
x = figure corresponding to the n° of elements

Special Options

The pipe fittings welded on the bottom manifold can be positioned at any point at a specified distance between centres. It is compulsory in this type of installation to install a diaphragm during production to ensure the product functions correctly.

The minimum possible distance between centres is equal to 50 mm (see fig. 2), while the maximum distance depends on the length of the radiator. The maximum distance between centres can be $H' = 34 \times (n^\circ \text{ of elements} - 2)$ (see fig. 1).

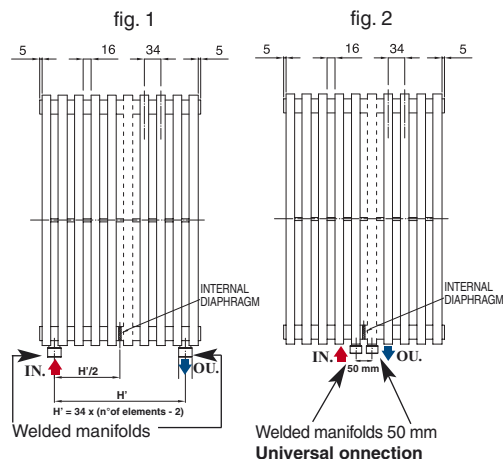

IRSAP
i termoarredatori